



CASEPACKER C10

When you're called a classic, you never go out of style.

Infusion 3.1 Ready

Up to 10 cases per min

Low Maintenance

Very flexible for various product formats

Small footprint due to integrated infeed design

Servo indexer with dual servo flight bar system for roll configurations

Rapid change-overs utilizing handwheels and touch-screen inputs

The Infinity C10 casepacker sets the bar when it comes to tissue converting and hygiene care products. It's designed for tissue rolls/packs, boxed products, diaper packs, folded products, industrial rolls, and more. The C10 is designed to erect a case or tray, collate the incoming product, fill the case or tray, and discharge it onto a live roller conveyor – running 24/7. It's simple, modular design ensures fast, repeatable change-overs, ease of use, low maintenance and high production efficiency. Add to that its overall accessibility and small footprint, and the Infinity C10 truly represents what we stand for, efficiency by design.

CASEPACKER C10 TECHNICAL DATA



Product Types: boxed feminine care products, tissue rolls, tissue packs, tissue boxes, household towel, household towel packs, diapers and wet wipes.

Case Size Range

Width: Min - 210mm (8.25"), Max - 559mm (22.00")
 Length: Min - 292mm (11.50"), Max - 813mm (32.00")
 Height: Min - 229mm (9.00"), Max - 610mm (24.00")
 Optional: corrugate tray

Product Characteristics

Infeed Product Width: Min - 50mm (2.00"), Max - 419mm (16.50")
 Infeed Product Length: Min - 89mm (3.50"), Max - 610mm (24.00")
 Infeed Product Height: Min - 64mm (2.50"), Max - 457mm (18.00")

KD Characteristic

KD stack height: Min - 279mm (11.00"), Max - 1219mm (48.00")
 Flat KD length: Min 502mm (19.75"), See Note 1
 Flat KD width: Min - 438mm (17.25"), Max 1118mm (44.00")

Machine Speed

Production: up to 10 c/min
 (Dependent upon model and config.)

Power / Air Requirements

	International Measurement	US Measurement
Air Consumption	284 NL/min	10 CFM
Air Pressure	5.52 bar	80 PSI
Main Power*	380 volt, 3 phase, 50 hertz	480 volt, 3 phase, 60 hertz
Installed Power*	49 kVA	60 Amps
Control power	24 VDC	24 VDC
Weight	~7,030 kg	~15,500 lbs.


Change-over Time

Pack to Pack: 30 minutes

Notes:
 1. Box width + 1/2 box length cannot exceed 35"
 2. Box height = 1/2 box width cannot exceed 32"
 3. Size change parts will be required to meet full range of machine
 *Max power requirements are subject to change based on country



Sample Configurations

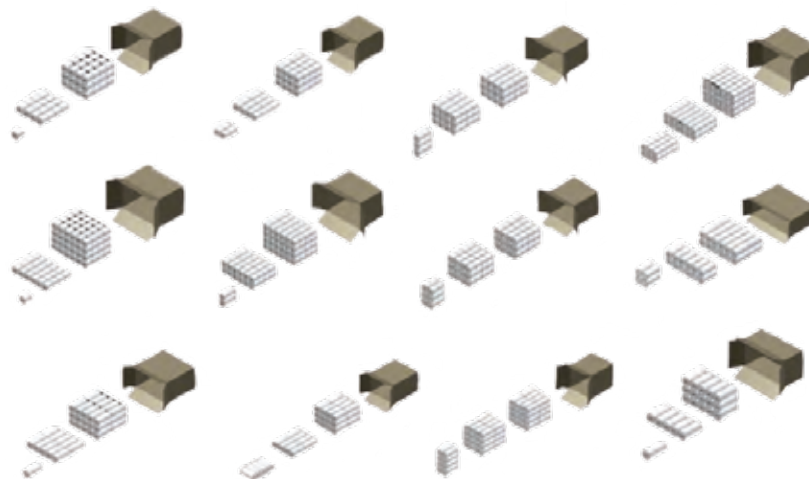

Corporate Headquarters:
 2249 American Blvd
 De Pere, WI 54115, USA
 Tel: 920-965-0222

European Office :
 Via Buozzi 55
 40057 Cadriano di Granarolo, Bologna, Italy
 Tel:+39-051-0560980

Infinity Machine & Engineering Corp.
 info@infinitymec.com
 www.infinitymec.com